

347V LED DRIVER 96W 0-10V Dimming

Output Range 24V to 39V **Selectable** Multi Current **1.75A to 2.45A** Max **96W**

PRELIMINARY SPEC

347V Electronic **Selectable** Multi Current Range 1.75A to 2.45A LED Driver 0-10V Dimming. Output Range of 24V to 39V for Single circuit 96W maximum.

Technical Specification:

ROHS Compliant	Input Voltage range:	\pm 5%
EMI FCC Parts 18, Subparts C, Class A	Output Load range	\pm 5%
Rating: IP 66 Damp, Dry	Input Frequency:	50/60HZ
Output Open/Short Protection	THD:	< 20%
Min. Starting Temp: - 40° C	Power Factor Min:	0.90
Max. Case Temp: 90° C	Remote Mounting Distance:	18AWG -18 ft

Case Size: Series FS3

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

2/1/15


INPUT VOLTAGE	INPUT CURRENT	INPUT WATTS	OUTPUT POWER WATTS MAX	OUTPUT VOLTAGE	OUTPUT CURRENT AMPS	TYPICAL EFFICIENCY %	MODEL
347	0.23A	79	68	24 - 39	1.75A	86	NC2450D3C96WSDIM
	0.27A	94	82	24 - 39	2.1A	87	
	0.31A	109	96	24 - 39	2.45A	88	

LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Product will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer

Lead Length

Colour	inch	cm
Black	5.9	15
White	5.9	15
Blue	5.9	15
Red	5.9	15
Gray	5.9	15
Purple	5.9	15

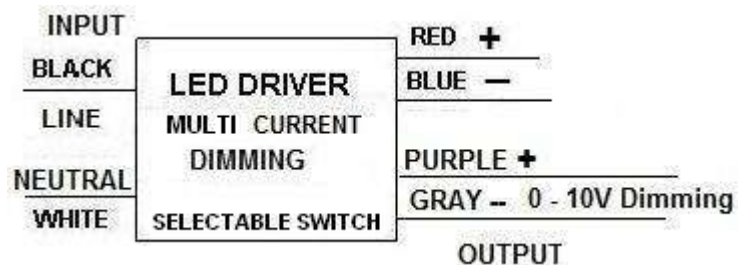

WARNING: Always Disconnect Power Before Handling.
Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.

Series FS3	L	W	H	ML
Case Size:	241mm	61mm	37mm	226mm
	9.5inch	2.4inch	1.46inch	8.9inch

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7
 TEL: 604-904-9533 FAX: 604-904-9634
 EMAIL: sagelighting@shaw.ca www.sagelighting.com

*Sage
Lighting Ltd.*