

# EMERGENCY LED DRIVER KIT 60W 1-10V Dimming

## Output Range 24V to 40V Constant Current 1500mA Max **60W**

Universal Voltage 120-277V Electronic Constant Current Emergency LED Driver with Battery Pack Max 10W for 1-10V Dimming application with one wire Test Switch/LED Indicator for easy installation. Output Range of 24V to 40V for 60W maximum.

### Technical Specification:

Class 2 UL, CUL Certified, ROHS Compliant  
 EMI FCC Parts 18, Subparts C, Class A  
 Rating: IP 30 Damp Dry  
 Output Open/Short Protection  
 Min. Starting Temp: 0° C  
 Max. Case Temp: 90° C  
 Typical Efficiency 84%



Input Voltage range:  $\pm 10\%$   
 Output Load range  $\pm 5\%$   
 Input Frequency: 50/60HZ  
 THD:  $< 20\%$   
 Power Factor Min: 0.90  
 Remote Wiring Distance Full Load: 18AWG -18 ft

**Case Size: Series L1**

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

INPUT VOLTAGE	INPUT CURRENT	INPUT WATTS	OUTPUT POWER WATTS MAX	OUTPUT VOLTAGE	OUTPUT CURRENT AMPS	MODEL
120	0.66A	71	60	24 to 40V	1.5	<b>ENU1500C60WSD64</b>
277	0.29A					

### Emergency Power Spec


OPERATING DURATION	INPUT CURRENT	INPUT WATTS	Battery Charge Current	Battery Voltage	Battery Charge Time Max	OUTPUT WATTS	OUTPUT CURRENT Max	OUTPUT VOLTAGE
90 Minutes	60mA	4	185mA	6.4V	24 hours	10	190	15 to 55V

### LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. 3 YEAR for battery. Manufacturer warrants to the purchaser: Product will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer

### Lead Length

Colour	inch	cm
Black	25.59	65
White	25.59	65
Blue	25.59	65
Red	25.59	65
Yellow/Black	25.59	65
Yellow	25.59	65
Brown	25.59	65
Test Switch/LED Indicator	30.7	78

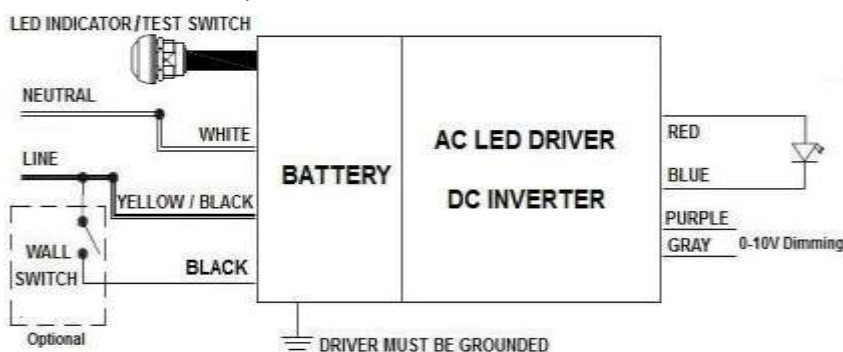

Series	L1	L	W	H	ML
Case Size:	261mm	61mm	37mm	246mm	
	10.28inch	2.4inch	1.46inch	9.69inch	

**WARNING: Always Disconnect Power Before Handling. Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.**

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7  
 TEL: 604-904-9533 FAX: 604-904-9634  
 EMAIL: sagelighting@shaw.ca www.sagelighting.com

