

# LED DRIVER Single Output Circuit 200W

Output Range 114V to 190V Constant Current **1050mA** Max 200W  
Surge 6KV

Universal Voltage 120-277V Electronic Constant Current 1050mA LED Driver. Output Range of 114V to 190V for Single circuit 200W maximum.

## Technical Specification:

Class 1 UL, CUL Recognized, ROHS Compliant  
EMI FCC Parts 18, Subparts C, Class A  
Rating: IP 66 Damp, Dry  
Output Open/Short Protection  
Min. Starting Temp: - 40° C  
Max. Case Temp: 90° C  
Typical Efficiency: 93%

Input Voltage range:  $\pm 10\%$   
Output Load range:  $\pm 5\%$   
Input Frequency: 50/60HZ  
THD: < 20%  
Power Factor Min: 0.90  
Remote Wiring Distance Full Load: 18AWG - 18 ft  
Surge: 6KV

**Case Size: Series FS5**

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice


INPUT VOLTAGE	INPUT CURRENT	INPUT WATTS	OUTPUT POWER WATTS MAX	OUTPUT VOLTAGE	OUTPUT CURRENT AMPS	MODEL
120V-277V	1.78A - 0.78A	215	200	114V - 190V	1.05A	<b>NU1050C200WS</b>

### LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Product will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer

### Lead Length

Colour	inch	cm
Black	5.9	15
White	5.9	15
Blue	5.9	15

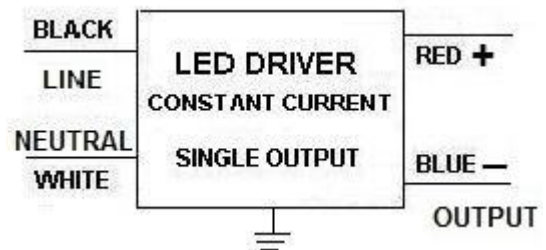

Series FS5  
Case Size: L 241mm 9.5inch, W 66mm 2.6inch, H 40.5mm 1.6inch, ML 226mm 8.9inch



**WARNING: Always Disconnect Power Before Handling.**  
Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.

# LED DRIVER Single Output Circuit 200W

Output Range 114V to 190V Constant Current **1050mA** Max 200W  
Surge 6KV

NU1050C200WS Series FS5

Page...2

