

# LED DRIVER Programmable 98W 0-10V Dimming

## 5-100% Output Range of 27V to 55V Current 1.4A to 2.75A Max 98W

### Class 2 Low Profile Slim Case Size with Terminal Blocks

Universal Voltage 120-277V Electronic **Programmable (NFC)** LED Driver 0-10V Dimming  
**5-100%**. Output Range of 15V to 55V for Single circuit 98W maximum.

### Technical Specification:

Class 2 UL, CUL Recognized, ROHS Compliant  
 EMI FCC Parts 18, Subparts C, Class A  
 Rating: TL IP 30 Damp  
 Output Open/Short Protection  
 Min. Starting Temp: 0° C  
 Max. Case Temp: 90° C  
 Typical Efficiency 89%

Input Voltage range:  $\pm 10\%$   
 Output Load range  $\pm 5\%$   
 Input Frequency: 50/60HZ  
 THD:  $< 20\%$   
 Power Factor Min: 0.90  
 Remote Wiring Distance Full Load: 18AWG -18 ft  
 Terminal Blocks


**Case Size: Series E14**

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

INPUT VOLTAGE	INPUT CURRENT	INPUT WATTS	OUTPUT POWER WATTS MAX	OUTPUT VOLTAGE	OUTPUT CURRENT AMPS	MODEL
120	0.93	110	98	27 - 55V	1.4 - 2.75	PU2750C98WS-D5
277	0.4					

#### LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Product will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer

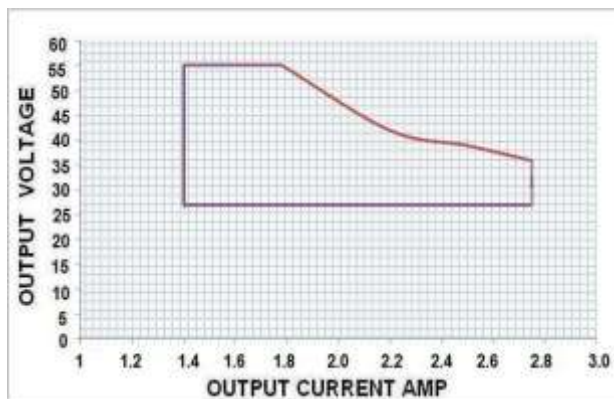

#### 0-10V Dimmer Compatibility Chart

LEVITON	LUTRON
DS710-10Z	NFTV
	DVTV-WH

Series E 14 L W H ML  
 Case Size: 395mm 38 mm 27.5 mm 387mm  
 15.5inch 1.49inch 1.08inch 15.2inch

**WARNING: Always Disconnect Power Before Handling.**  
**Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.**



Both Positive & Negative Output Connectors are equal - similar electrical position  
 Place the Programmable wand above the NFC Mark on the LED Driver to start programming

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7  
 TEL: 604-904-9533 FAX: 604-904-9634  
 EMAIL: sagelighting@shaw.ca www.sagelighting.com

