

347V LED DRIVER Programmable 30W 0-10V Dimming

1-100% Output Range 15V to 55V Current 0.35A to 1.25A Max 30W

Class 2 Small Case Size with Side leads

347V Electronic **Programmable (NFC)** LED Driver 0-10V Dimming **1-100%**. 1% Off at 1.25A. Output Range of 15V to 55V for Single circuit 30W maximum.

Technical Specification:

Class 2 UL, CUL Certified, ROHS Compliant
 EMI FCC Parts 18, Subparts C, Class A
 Rating: **Class P** IP 64 Damp, Dry
 Output Open/Short Protection
 Min. Starting Temp: 0° C
 Max. Case Temp: 90° C
 Typical Efficiency 85%



Input Voltage range: $\pm 10\%$
 Output Load range $\pm 5\%$
 Input Frequency: 50/60HZ
 THD: $< 20\%$
 Power Factor Min: 0.90
 Remote Wiring Distance Full Load: 18AWG -18 ft
 Optional Dim to OFF at 1.25A



Case Size: Series C1U

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

INPUT VOLTAGE	INPUT CURRENT	INPUT WATTS	OUTPUT POWER WATTS MAX	OUTPUT VOLTAGE	OUTPUT CURRENT AMPS	MODEL
347	0.1A	37	30	15 – 55V	0.35 - 1.25	PC1250C30WSD

LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Product will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer

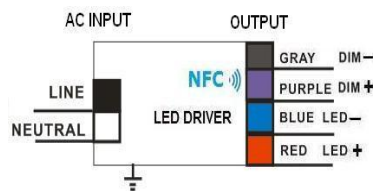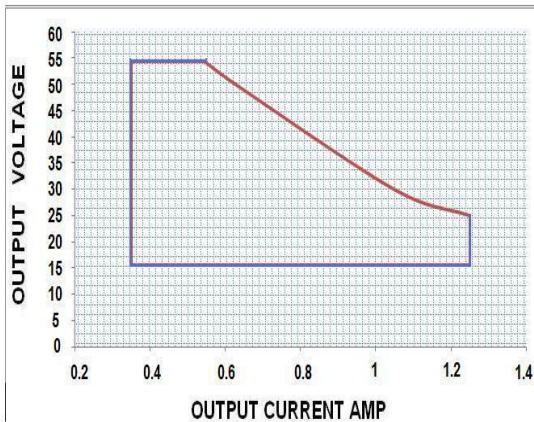


Place the Programmable wand above the NFC Mark on the LED Driver to start programming

0-10V Dimmer

Compatibility Chart

LEVITON	LUTRON
DS710-10Z	NFTV
	DVTV-WH

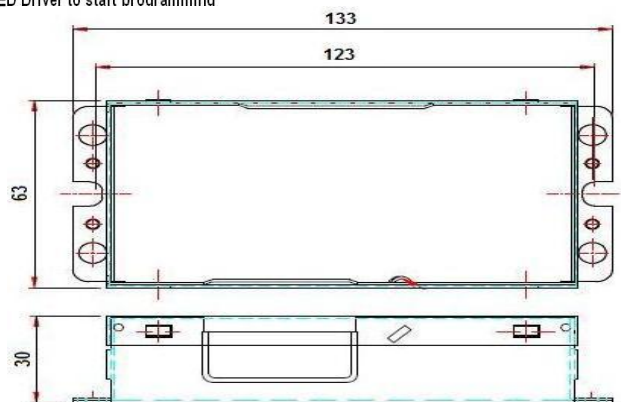

Series C1U L W H ML
 Case Size: 133mm 63mm 30mm 123mm
 5.23inch 2.48inch 1.18inch 4.84inch

WARNING: Always Disconnect Power Before Handling.
Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7
 TEL: 604-904-9533 FAX: 604-904-9634
 EMAIL: sagelighting@shaw.ca www.sagelighting.com

