

LED DRIVER Programmable 30W 0-10V Dimming

1-100% Output Range 15V to 55V Current 0.35A to 1.25A Max **30W**
Class 2 Small Case Size with Side leads

Universal Voltage 120-277V Electronic **Programmable (NFC)** LED Driver 0-10V Dimming **1-100%**. Output Range of 15V to 55V for Single circuit 30W maximum.

Technical Specification:

Class 2 UL, CUL Certified, ROHS Compliant
 EMI FCC Parts 18, Subparts C, Class A
 Rating: TL IP 64 Damp, Dry
 Output Open/Short Protection
 Min. Starting Temp: 0° C
 Max. Case Temp: 90° C
 Typical Efficiency 85%
 Optional Dim to OFF at 1.25A



Input Voltage range: $\pm 10\%$
 Output Load range $\pm 5\%$
 Input Frequency: 50/60HZ
 THD: $< 20\%$
 Power Factor Min: 0.90
 Remote Wiring Distance Full Load: 18AWG -18 ft

Case Size: Series CH4U

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

INPUT VOLTAGE	INPUT CURRENT	INPUT WATTS	OUTPUT POWER WATTS MAX	OUTPUT VOLTAGE	OUTPUT CURRENT AMPS	MODEL
120-277	0.3 - 0.13A	37	30	15 - 55	0.35 - 1.25	PU1250C30WSDC4

LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Product will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer

Lead Length

Colour	inch	cm
Black	5.9	15
White	5.9	15
Blue	5.9	15
Red	5.9	15
Gray	5.9	15
Purple	5.9	15


0-10V Dimmer

Compatibility Chart

LEVITON	LUTRON
DS710-10Z	NFTV
	DVTV-WH



Place the Programmable wand above the NFC Mark on the LED Driver to start programming

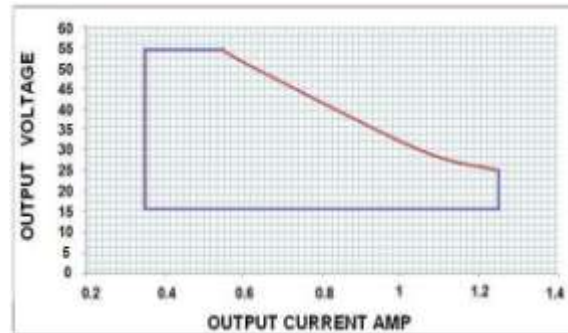

WARNING: Always Disconnect Power Before Handling.
 Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.

Series CH4U L W H ML
 Case Size: 158 mm 44 mm 31mm 149mm
 6.22inch 1.73inch 1.22inch 5.9inch

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7
 TEL: 604-904-9533 FAX: 604-904-9634
 EMAIL: sagelighting@shaw.ca www.sagelighting.com

