

LED DRIVER Programmable 50W 0-10V Dimming

1-100% Output Range 15V to 55V Current 0.40A to 1.4A Max 50W

Small Case Size - Bottom Mount Studs with leads No Mounting Flange

Universal Voltage 120-277V Electronic **Programmable (NFC)** LED Driver 0-10V Dimming
1-100%. Output Range of 15V to 55V for Single circuit 50W maximum.

Technical Specification:

Class 2 UL, CUL Certified, ROHS Compliant
 EMI FCC Parts 18, Subparts C, Class A
 Rating: TL IP 64 Damp
 Output Open/Short Protection
 Min. Starting Temp: 0° C
 Max. Case Temp: 90° C
 Typical Efficiency 90%
 Optional Dim to OFF at 1.4A



Input Voltage range: $\pm 10\%$
 Output Load range $\pm 5\%$
 Input Frequency: 50/60HZ
 THD: < 20%
 Power Factor Min: 0.90
 Remote Wiring Distance Full Load: 18AWG -18 ft
 Bottom Mount Studs

Case Size: Series C1B

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

INPUT VOLTAGE	INPUT CURRENT	INPUT WATTS	OUTPUT POWER WATTS MAX	OUTPUT VOLTAGE	OUTPUT CURRENT AMPS	MODEL
120	0.50	59	50	15 - 55	0.4 - 1.4	PU1400C50WSBD
277	0.22					

LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Product will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer




Lead Length

Colour	inch	cm
Black	5.9	15
White	5.9	15
Blue	5.9	15
Red	5.9	15
Gray	5.9	15
Purple	5.9	15

0-10V Dimmer

Compatibility Chart

LEVITON	LUTRON
DS710-10Z	NFTV
	DVTV-WH

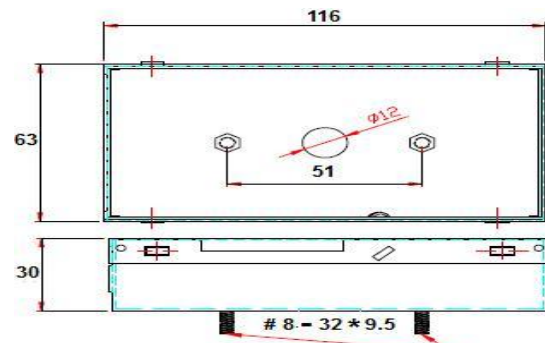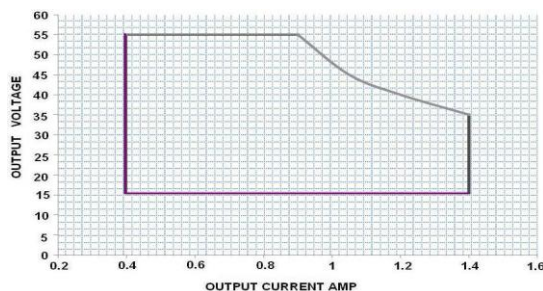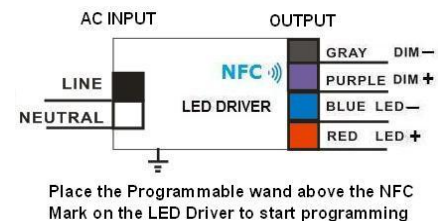

WARNING: Always Disconnect Power Before Handling.
 Case Should be Grounded. Install in Accordance
 with National and Local Electrical Codes.

Series C1B
 Case Size: L 116mm W 63mm H 30mm
 Bottom Feed: 4.56inch 2.48inch 1.18inch