

347V LED DRIVER Programmable 40W 0-10V Dimming

1-100% Output Range 15V to 55V Current 0.40A to 1.4A Max 40W

Class 2 Low Profile Slim Case Size with Terminal Blocks

347V Electronic **Programmable (NFC)** LED Driver 0-10V Dimming **1-100%**. Output Range of 15V to 55V for Single circuit 40W maximum.

Technical Specification:

Class 2 UL, CUL Recognized, ROHS Compliant
 EMI FCC Parts 18, Subparts C, Class A
 Rating: **TL** IP 30 Damp
 Output Open/Short Protection
 Min. Starting Temp: 0° C
 Max. Case Temp: 90° C
 Typical Efficiency 88%

Input Voltage range: $\pm 10\%$
 Output Load range $\pm 5\%$
 Input Frequency: 50/60HZ
 THD: < 20%
 Power Factor Min: 0.90
 Remote Wiring Distance Full Load: 18AWG -18 ft
 Terminal Blocks

Case Size: Series E13


Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

3/3/18

INPUT VOLTAGE	INPUT CURRENT	INPUT WATTS	OUTPUT POWER WATTS MAX	OUTPUT VOLTAGE	OUTPUT CURRENT AMPS	MODEL
347	0.143A	47	40	15 - 55V	0.4 - 1.4	PC1400C40WSD1-E13

LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Product will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer


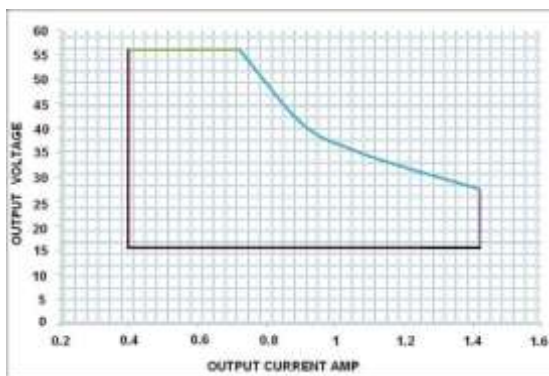


0-10V Dimmer Compatibility Chart

LEVITON	LUTRON
DS710-10Z	NFTV
	DVTV-WH

	L	W	H	ML
Series E13	314 mm	34mm	27.5mm	301mm
Case Size:	12.36inch	1.34inch	1.08inch	11.85inch

WARNING: Always Disconnect Power Before Handling.
Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.

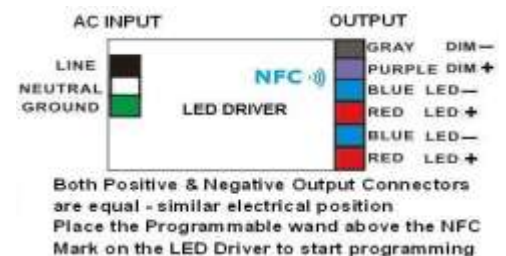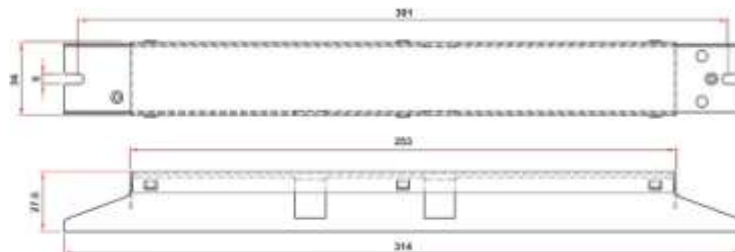

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7
 TEL: 604-904-9533 FAX: 604-904-9634
 EMAIL: sagelighting@shaw.ca www.sagelighting.com

Sage Lighting Ltd.