

# 347V LED DRIVER 100W 0-10V Dimming

Output Range 172V to 286V Constant Current 350mA Max 100W  
IP67

347V input Electronic Constant Current LED Driver 0-10V Dimming. Output Range of 172V to 286V for Single Output circuit 100W maximum

## Technical Specification:

Class 1 UL, CUL Recognized, ROHS Compliant  
EMI FCC Parts 18, Subparts C, Class A  
Rating: **IP67**, Class 2 UL  
Output Open/Short Protection  
Min. Starting Temp: - 40° C  
Max. Case Temp: 90° C  
Typical Efficiency: 90%

Input Voltage range:  $\pm 10\%$   
Output Load range  $\pm 1V$   
Input Frequency: 50/60HZ  
THD: < 10%  
Power Factor Min: 0.9  
Remote Wiring Distance Full Load: 18AWG -18 ft  
Surge Protection: 3 KV

**Case Size: Series FS8**

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

INPUT VOLTAGE	INPUT CURRENT	INPUT WATTS	OUTPUT POWER WATTS MAX	OUTPUT VOLTAGE DC	OUTPUT CURRENT DC AMPS	MODEL
<b>347</b>	0.64A	110	100	172 to 286V	0.35A	<b>NC350C100WSD-IP67</b>

### LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Product will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer


### Lead Length

Colour	inch	cm
Black	5.9	15
White	5.9	15
Blue	5.9	15
Red	5.9	15
Gray	5.9	15
Purple	5.9	15

### 0-10V Dimmer

#### Compatibility Chart

LEVITON	LUTRON
DS710-10Z	NFTV
	DVTV-WH

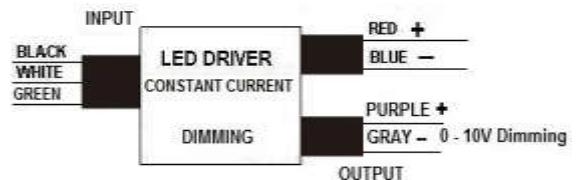

Case Size	L	W	H	ML
Series FS8	241mm	61.5mm	39mm	226mm
	9.5inch	2.42inch	1.54inch	8.9inch

**WARNING: Always Disconnect Power Before Handling.**  
Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.