

# 347V-480V LED DRIVER 200W 0-10V Dimming

## Output Range 114V to 190V Constant Current **1.05A** Max **200W**

347V-480V Electronic Constant Current 1050mA LED Driver 0-10V Dimming. Output Range of 114V to 190V for Single circuit 200W maximum.

### Technical Specification:

Class 1 UL, CUL Recognized, ROHS Compliant  
 EMI FCC Parts 18, Subparts C, Class A  
 Rating: IP 65 Damp, Dry  
 Output Open/Short Protection  
 Min. Starting Temp: - 40° C  
 Max. Case Temp: 90° C  
 Typical Efficiency: 90%

Input Voltage range:  $\pm 10\%$   
 Output Load range  $\pm 5\%$   
 Input Frequency: 50/60HZ  
 THD: < 20%  
 Power Factor Min: 0.90  
 Remote Wiring Distance Full Load: 18AWG -18 ft

**Case Size: Series FS5**

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

INPUT VOLTAGE	INPUT CURRENT	INPUT WATTS	OUTPUT POWER WATTS MAX	OUTPUT VOLTAGE	OUTPUT CURRENT AMPS	MODEL
347-480V	0.64A – 0.46A	222	200	114 to 190V	1.05A	<b>NCF1050C200WSD</b>

#### LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Product will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer


#### Lead Length

Colour	inch	cm
Black	5.9	15
White	5.9	15
Blue	5.9	15
Red	5.9	15
Gray	5.9	15
Purple	5.9	15


#### 0-10V Dimmer

##### Compatibility Chart

LEVITON	LUTRON
DS710-10Z	NFTV
	DVTV-WH

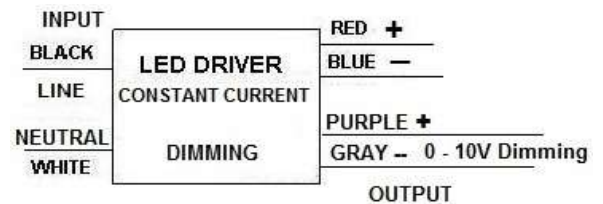

Series FS5  
 Case Size: L 241mm 9.5inch, W 66mm 2.6inch, H 40.5mm 1.6inch, ML 226mm 8.9inch

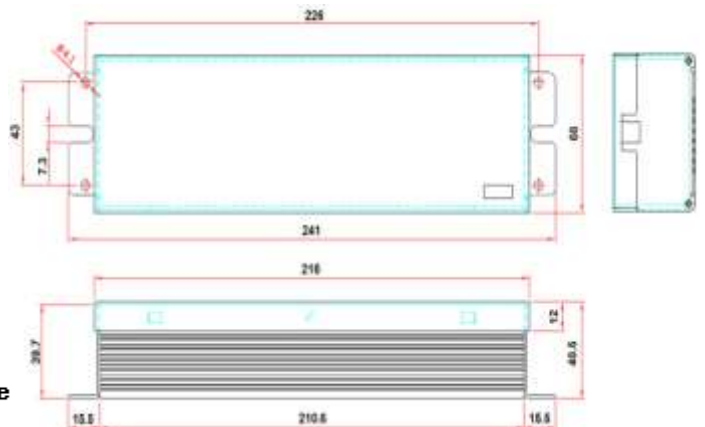

**WARNING: Always Disconnect Power Before Handling.**  
**Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.**

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7  
 TEL: 604-904-9533 FAX: 604-904-9634  
 EMAIL: sagelighting@shaw.ca www.sagelighting.com

*Sage Lighting Ltd.*