

347V-480V LED DRIVER 150W 0-10V Dimming

Output Range 32V to 54V Constant Current **2.8A** Max **150W**

347V-480V Electronic Constant Current 2800mA LED Driver 0-10V Dimming. Output Range of 32V to 54V for Single circuit 150W maximum.

Technical Specification:

Class 1 UL, CUL Recognized, ROHS Compliant
 EMI FCC Parts 18, Subparts C, Class A
 Rating: IP 65 Damp, Dry
 Output Open/Short Protection
 Min. Starting Temp: - 40° C
 Max. Case Temp: 90° C
 Typical Efficiency: 90%

Input Voltage range: **+ 10%**
 Output Load range **+ 5%**
 Input Frequency: **50/60HZ**
 THD: **< 20%**
 Power Factor Min: **0.90**
 Remote Wiring Distance Full Load: **18AWG -18 ft**

Case Size: Series FS4

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

INPUT VOLTAGE	INPUT CURRENT	INPUT WATTS	OUTPUT POWER WATTS MAX	OUTPUT VOLTAGE	OUTPUT CURRENT AMPS	MODEL
347-480V	0.48A – 0.34A	167	150	32 to 54V	2.8A	NCF2800C150WSD

LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Product will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer


Lead Length

Colour	inch	cm
Black	5.9	15
White	5.9	15
Blue	5.9	15
Red	5.9	15
Gray	5.9	15
Purple	5.9	15


0-10V Dimmer

Compatibility Chart

LEVITON	LUTRON
DS710-10Z	NFTV
	DVTV-WH

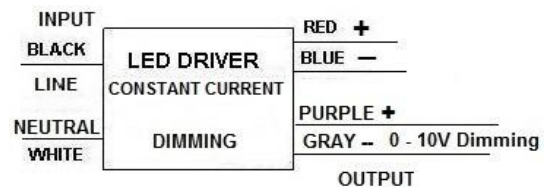

Series FS4	L	W	H	MI
Case Size:	241mm	61 mm	40mm	226mm
	9.5inch	2.4inch	1.57inch	8.9inch

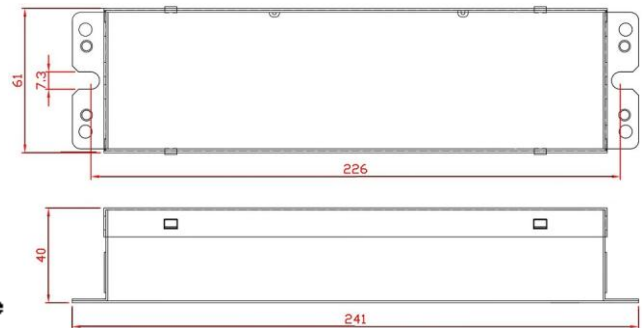

WARNING: Always Disconnect Power Before Handling.
Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7
 TEL: 604-904-9533 FAX: 604-904-9634
 EMAIL: sagelighting@shaw.ca www.sagelighting.com

*Sage
Lighting Ltd.*