

LED DRIVER 200W 0-10V Dimming

Output Range 114V to 190V Constant Current **1050mA** Max 200W
Surge 6KV

Universal Voltage 120-277V Electronic Constant Current 1050mA LED Driver 0-10V Dimming.
Output Range of 114V to 190V for Single circuit 200W maximum.

Technical Specification:

Class 1 UL, CUL Recognized, ROHS Compliant
EMI FCC Parts 18, Subparts C, Class A
Rating: IP 66 Damp, Dry
Output Open/Short Protection
Min. Starting Temp: - 40° C
Max. Case Temp: 90° C
Typical Efficiency: 93%

Input Voltage range: $\pm 10\%$
Output Load range: $\pm 5\%$
Input Frequency: 50/60HZ
THD: < 20%
Power Factor Min: 0.90
Remote Wiring Distance Full Load: 18AWG - 18 ft
Surge: 6KV

Case Size: Series FS5

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

INPUT VOLTAGE	INPUT CURRENT	INPUT WATTS	OUTPUT POWER WATTS MAX	OUTPUT VOLTAGE	OUTPUT CURRENT AMPS	MODEL
120V-277V	1.78A - 0.78A	215	200	114V - 190V	1.05A	NU1050C200WSD

LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Product will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer


Lead Length

Colour	inch	cm
Black	5.9	15
White	5.9	15
Blue	5.9	15
Red	5.9	15
Gray	5.9	15
Purple	5.9	15



0-10V Dimmer

Compatibility Chart

LEVITON	LUTRON
DS710-10Z	DVTV-WH
	NFTV

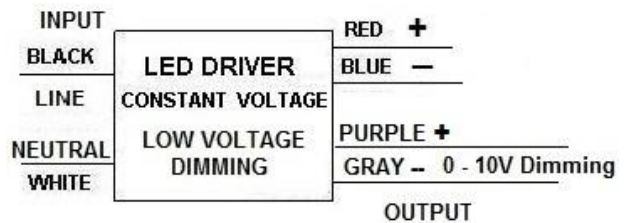

Series FS5 Case Size: L 241mm 9.5inch, W 66mm 2.6inch, H 40.5mm 1.6inch, ML 226mm 8.9inch

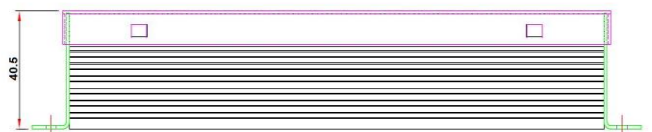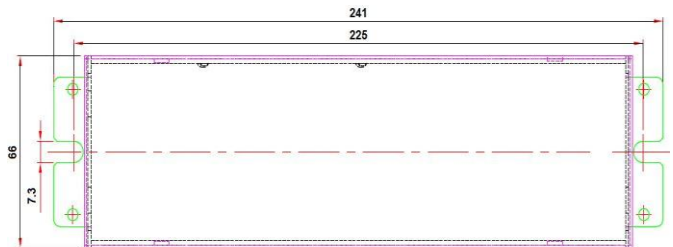

WARNING: Always Disconnect Power Before Handling.
Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.

LED DRIVER 200W 0-10V Dimming

Output Range 114V to 190V Constant Current **1050mA** Max 200W
Surge 6KV

NU1050C200WSD Series FS5

Page...2

