

LED DRIVER 60W 0-10V Dimming

Low Voltage 12V Output Constant Voltage Max **60W**

IP67 Class 2 Compact Case

Electronic Universal Voltage 120V-277V input LED Driver. 12V output Constant Voltage for Single circuit 60W maximum Dimming Range 10-100%.

Technical Specification:

Class 2 UL, CUL Recognized, ROHS Compliant
EMI FCC Parts 18, Subparts C, Class A
Rating: IP67 Class 2
Output Open/Short Protection
Min. Starting Temp: - 40° C
Max. Case Temp: 90° C
Typical Efficiency: 85%

Input Voltage range: $\pm 10\%$
Output Load range $\pm 1V$
THD: $< 10\%$
Input Frequency: 50/60HZ
Power Factor Min: 0.90
Remote Wiring Distance Full Load: 18AWG -18 ft

Case Size: Series C9U

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

INPUT VOLTAGE	INPUT CURRENT	INPUT WATTS	OUTPUT POWER WATTS MAX	OUTPUT VOLTAGE DC CV	OUTPUT CURRENT DC AMPS	MODEL
120	0.61A	70	60	12	0.5 - 5A	NU12V60WSD67C9
277	0.27A					



LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Product will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer

Lead Length		
Colour	inch	cm
Black	5.9	15
White	5.9	15
Blue	5.9	15
Red	5.9	15
Gray	5.9	15
Purple	5.9	15

0-10V Dimmer Compatibility Chart

LEVITON	LUTRON
DS710-10Z	NFTV
IP710-DL	

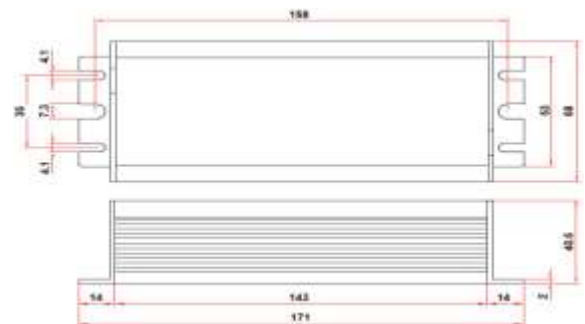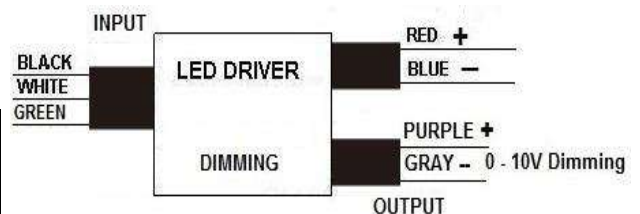

Case Size:	L	W	H	ML
Series C9U	171mm	68mm	40.5mm	158mm
	6.73inch	2.68inch	1.6inch	6.22inch

WARNING: Always Disconnect Power Before Handling.
Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7
TEL: 604-904-9533 FAX: 604-904-9634
EMAIL: sagelighting@shaw.ca www.sagelighting.com

*Sage
Lighting Ltd.*