

347V LED DRIVER Programmable 80W 0-10V Dimming

Output Range of 27V to 55V Current 1.05A to 2.1A Max **80W**

Class 2 Low Profile Slim Case Size with Terminal Blocks

347V Electronic **Programmable (NFC)** LED Driver 0-10V Dimming. Output Range of 27V to 55V for Single circuit 80W maximum.

Technical Specification:

Class 2 UL, CUL Recognized, ROHS Compliant
 EMI FCC Parts 18, Subparts C, Class A
 Rating: **TL** IP 30 Damp
 Output Open/Short Protection
 Min. Starting Temp: - 40° C
 Max. Case Temp: 90° C
 Typical Efficiency 88%

Input Voltage range: $\pm 10\%$
 Output Load range $\pm 5\%$
 Input Frequency: 50/60HZ
 THD: < 20%
 Power Factor Min: 0.90
 Remote Wiring Distance Full Load: 18AWG -18 ft
 Terminal Blocks

Case Size: Series E14


Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

3/3/18

INPUT VOLTAGE	INPUT CURRENT	INPUT WATTS	OUTPUT POWER WATTS MAX	OUTPUT VOLTAGE	OUTPUT CURRENT AMPS	MODEL
347	0.26	91	80	27 - 55V	1.05 - 2.1	PC2100C80WSDIM

LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Product will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer

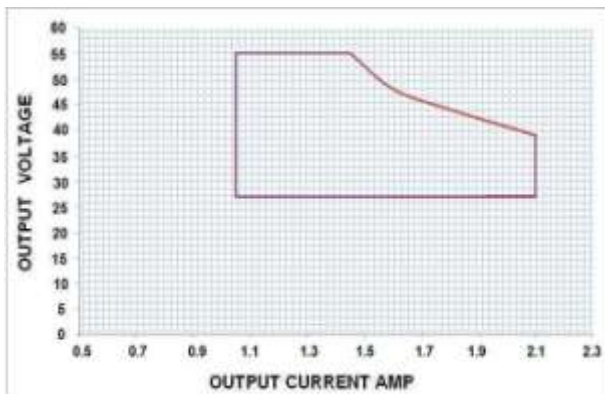


0-10V Dimmer

Compatibility Chart

LEVITON	LUTRON
DS710-10Z	NFTV
	DVTV-WH

Series E 14 L W H ML
 Case Size: 395mm 38 mm 27.5 mm 387mm
 15.5inch 1.49inch 1.08inch 15.2inch

WARNING: Always Disconnect Power Before Handling.
Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.

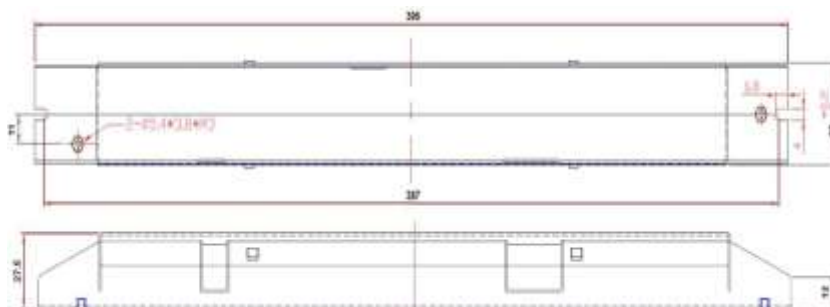

Both Positive & Negative Output Connectors are equal - similar electrical position. Place the Programmable wand above the NFC Mark on the LED Driver to start programming