

LED DRIVER Single Output Circuit IP67

Low Voltage 12V Output Constant Voltage Max **60W**

IP67 Class 2

Electronic Universal Voltage 120V-277V input LED Driver. 12V output Constant Voltage for Single circuit 60W maximum.

Technical Specification:

Class 2 UL, CUL Recognized, ROHS Compliant
 EMI FCC Parts 18, Subparts C, Class A
 Rating: IP 67 Damp, Dry Class 2
 Output Open/Short Protection
 Min. Starting Temp: - 40° C
 Max. Case Temp: 90° C
 Typical Efficiency: 83%

Input Voltage range: $\pm 10\%$
 Output Load range $\pm 1V$
 THD: $< 10\%$
 Input Frequency: 50/60HZ
 Power Factor Min: 0.95
 Remote Mounting Distance: 18AWG - 18 ft

Case Size: Series FS8


Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

INPUT VOLTAGE	INPUT CURRENT	INPUT WATTS	OUTPUT POWER WATTS MAX	OUTPUT VOLTAGE DC CV	OUTPUT CURRENT DC AMPS	MODEL
120	0.61A	74	60	12	5A	NU12V60WS-IP67
277	0.27A					

LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Product will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer

Lead Length		
Colour	inch	cm
Black	5.9	15
White	5.9	15
Blue	5.9	15
Red	5.9	15

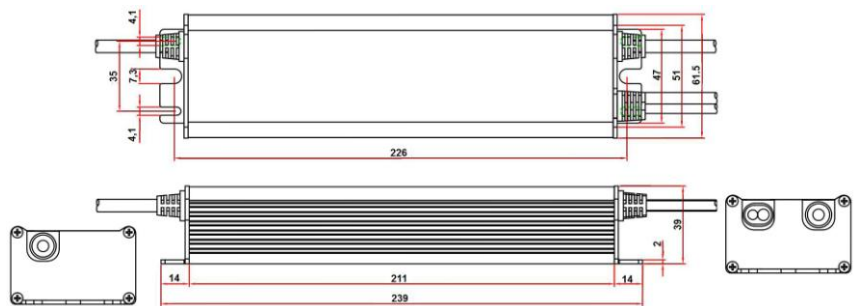

Case Size	L	W	H	ML
Series FS8	241mm	61.5mm	39mm	226mm
	9.5inch	2.42inch	1.54inch	8.9inch

WARNING: Always Disconnect Power Before Handling.
Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.



1500 Marine Drive, #200 North Vancouver, BC V7P 1T7
 TEL: 604-904-9533 FAX: 604-904-9634
 EMAIL: sagelighting@shaw.ca www.sagelighting.com

*Sage
Lighting Ltd.*