

# LED EMERGENCY BATTERY PACK

Output Voltage 15V to 55V Constant Current 190mA **Max 10W**

With Flexible Metal Conduit for Use with AC Driver 8A Max and LED Module with 15-55V Output

Universal Voltage 120-277V Electronic LED Emergency Battery Pack for Constant Current LED Driver 0-10V Dimming with one wire Test Switch/LED Indicator for easy installation. Output Range of 15V to 55V for 10W maximum.

## Technical Specification:

UL, CUL Certified, ROHS Compliant

Rating: IP30

Battery Type/Model Number: LiFePO4 6.4V 3200mAh



Case Size: MUL

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice


OPERATING DURATION	INPUT CURRENT	INPUT WATTS	Battery Charge Current	Battery Voltage	Battery Charge Time Max	OUTPUT WATTS	OUTPUT CURRENT Max	OUTPUT VOLTAGE	MODEL
90 Minutes	60mA	4	185mA	6.4V	24 hours	10	190	15 to 55V	EM10W1555B64FT

### LIMITED WARRANTY



5 YEAR at maximum case temperature 60 deg C. 3 YEAR at maximum case temperature 66 deg C. 3 YEAR for battery. Manufacturer warrants to the purchaser: Product will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer

### Lead Length

Colour	inch	cm
Black	25.59	65
White	25.59	65
Blue	25.59	65
Red	25.59	65
Yellow/Black	25.59	65
Yellow	25.59	65
Brown	25.59	65
Test Switch/LED Indicator	30.7	78

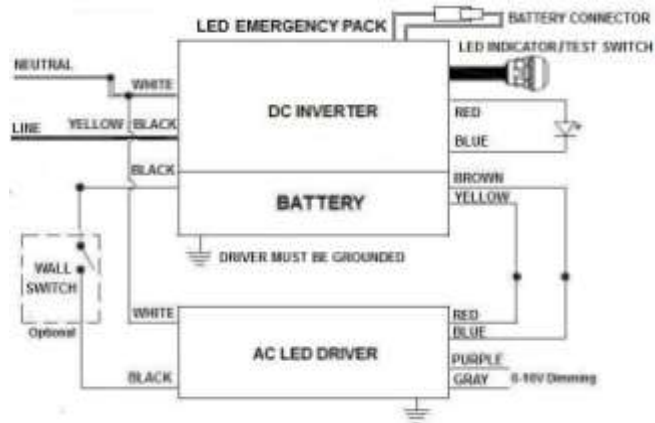

### LED INDICATOR / TEST SWITCH MOUNTING DIMENSIONS

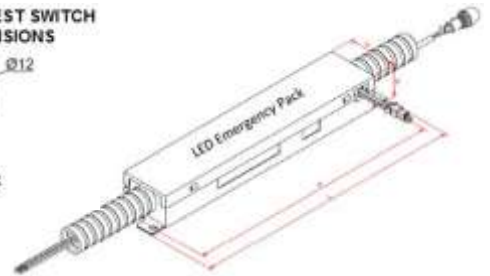

Series MUL	L	W	H	ML
Case Size:	241mm	43mm	29mm	226mm
	9.5inch	1.7inch	1.14inch	8.9inch

**WARNING: Always Disconnect Power Before Handling.**  
**Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.**