

# 347V LED DRIVER Programmable 60W 0-10V Dimming

## 1-100% Output Range 27V to 55V Current 0.7A to 1.4A Max 60W

### Class 2 Low Profile Slim Case Size with Terminal Blocks

347V Electronic **Programmable (NFC)** LED Driver 0-10V Dimming **1-100%**. Output Range of 27V to 55V for Single circuit 60W maximum.

### Technical Specification:

Class 2 UL, CUL Certified, ROHS Compliant  
 EMI FCC Parts 18, Subparts C, Class A  
 Rating: **Class P** IP 30 Damp, Dry  
 Output Open/Short Protection  
 Min. Starting Temp: 0° C  
 Max. Case Temp: 90° C  
 Typical Efficiency 90%  
 Optional Dim to OFF at 1.4A



Input Voltage range:  $\pm 10\%$   
 Output Load range:  $\pm 5\%$   
 Input Frequency: 50/60HZ  
 THD: < 20%  
 Power Factor Min: 0.90  
 Remote Wiring Distance Full Load: 18AWG -18 ft  
 Terminal Blocks

**Case Size: Series E13**


Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

1/3/18

INPUT VOLTAGE	INPUT CURRENT	INPUT WATTS	OUTPUT POWER WATTS MAX	OUTPUT VOLTAGE	OUTPUT CURRENT AMPS	MODEL
347	0.2	69	60	27 – 55V	0.7 - 1.4	PC1400C60WSD

#### LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Product will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer


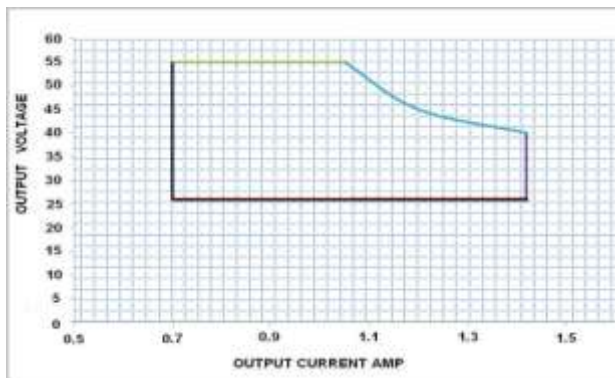


#### 0-10V Dimmer Compatibility Chart

LEVITON	LUTRON
DS710-10Z	NFTV
	DVTV-WH

	L	W	H	ML
Series E13	314 mm	34mm	27.5mm	301mm
Case Size:	12.36inch	1.34inch	1.08inch	11.85inch

**WARNING: Always Disconnect Power Before Handling.**  
**Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.**

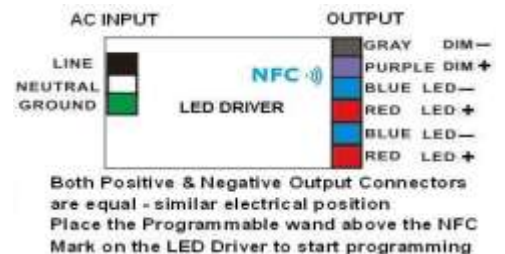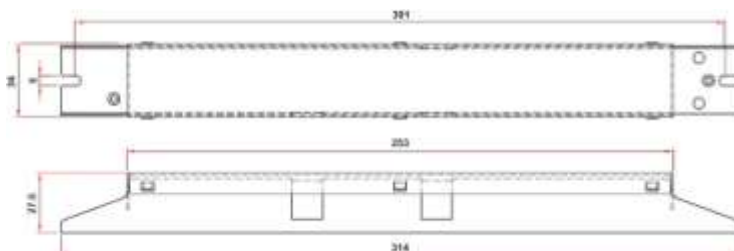

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7  
 TEL: 604-904-9533 FAX: 604-904-9634  
 EMAIL: sagelighting@shaw.ca www.sagelighting.com

