

LED DRIVER Programmable 30W 0-10V Dimming

1-100% Output Range 15V to 55V Current 0.35A to 1.25A Max 30W

Class 2 Low Profile Slim Case Size with Side Leads

Universal Voltage 120-277V Electronic **Programmable (NFC)** LED Driver 0-10V Dimming **1-100%**. Output Range of 15V to 55V for Single circuit 30W maximum.

Technical Specification:

Class 2 UL, CUL Certified, ROHS Compliant Input Voltage range:

EMI FCC Parts 18, Subparts C, Class A

Rating: TL IP 30 Damp, Dry

Output Open/Short Protection

Min. Starting Temp: 0° C

Max. Case Temp: 90° C

Typical Efficiency 85%



Output Load range $\pm 10\%$

Input Frequency: $\pm 5\%$

THD: < 20%

Power Factor Min: 0.90

Remote Wiring Distance Full Load: 18AWG -18 ft

Case Size: Series E3L

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

1/3/18

INPUT VOLTAGE	INPUT CURRENT	INPUT WATTS	OUTPUT POWER WATTS MAX	OUTPUT VOLTAGE	OUTPUT CURRENT AMPS	MODEL
120-277	0.3 - 0.13A	37	30	15 - 55V	0.35 - 1.25	PU1250C30WSDE3

LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Product will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer



Lead Length

Colour	inch	cm
Black	5.9	15
White	5.9	15
Blue	5.9	15
Red	5.9	15
Gray	5.9	15
Purple	5.9	15


0-10V Dimmer

Compatibility Chart

LEVITON	LUTRON
DS710-10Z	NFTV
	DVTV-WH

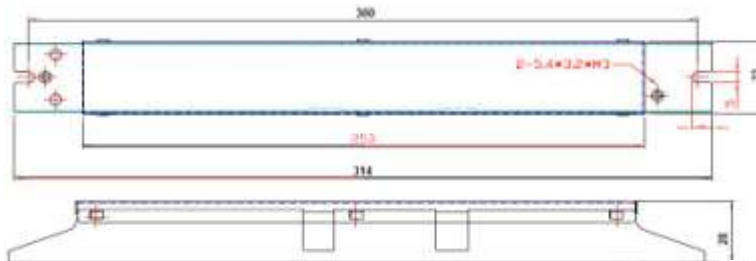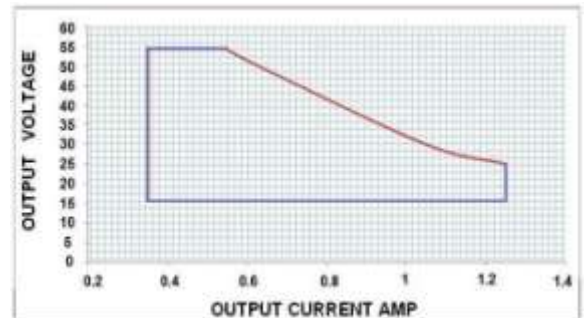

WARNING: Always Disconnect Power Before Handling.
Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.

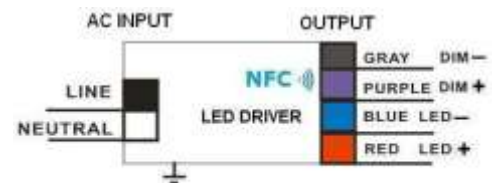

Place the Programmable wand above the NFC Mark on the LED Driver to start programming

Case Size:	L	W	H	ML
Series E3L	325 mm	34mm	29mm	317mm
	12.8inch	1.34inch	1.14inch	12.48inch