

LED DRIVER Programmable 60W 0-10V Dimming

1-100% Output Range 27V to 55V Constant Current 0.7A to 1.4A Max **60W**
Class 2 Low Profile Slim Case Size with Terminal Blocks

Universal Voltage 120-277V Electronic **Programmable (NFC)** LED Driver 0-10V Dimming
1-100%. Output Range of 27V to 55V for Single circuit 60W maximum.

Technical Specification:

Class 2 UL, CUL Certified, ROHS Compliant
 EMI FCC Parts 18, Subparts C, Class A
 Rating: **Class P** IP 30 Damp, Dry
 Output Open/Short Protection
 Min. Starting Temp: 0° C
 Max. Case Temp: 90° C
 Typical Efficiency 90%
 Optional Dim to OFF at 1.4A



Input Voltage range: **+ 10%**
 Output Load range **+ 5%**
 Input Frequency: **50/60HZ**
 THD: **< 20%**
 Power Factor Min: **0.90**
 Remote Wiring Distance Full Load: **18AWG -18 ft**
 Terminal Blocks

Case Size: Series E13


Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

1/3/18

INPUT VOLTAGE	INPUT CURRENT	INPUT WATTS	OUTPUT POWER WATTS MAX	OUTPUT VOLTAGE	OUTPUT CURRENT AMPS	MODEL
120	0.6A	69	60	27 – 55V	0.7 - 1.4	PU1400C60WSD
277	0.26A					

LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Product will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer

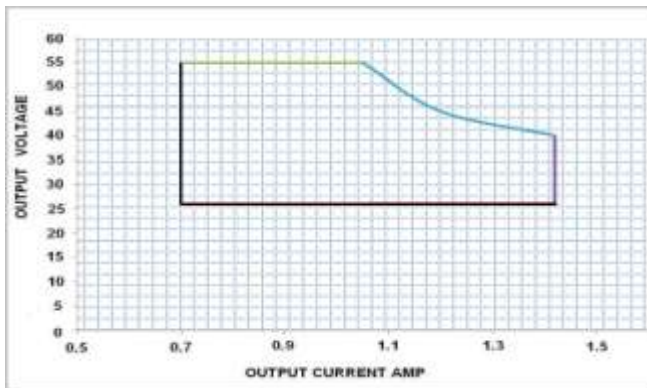


0-10V Dimmer

Compatibility Chart

LEVITON	LUTRON
DS710-10Z	NFTV
	DVTV-WH

	L	W	H	ML
Series E13	314 mm	34mm	27.5mm	301mm
Case Size:	12.36inch	1.34inch	1.08inch	11.85inch

WARNING: Always Disconnect Power Before Handling.
Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.

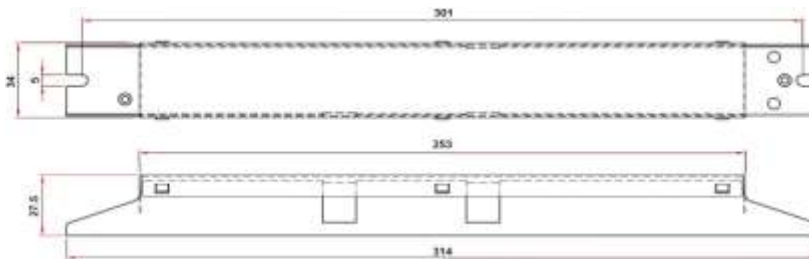

Both Positive & Negative Output Connectors are equal - similar electrical position
 Place the Programmable wand above the NFC Mark on the LED Driver to start programming