

347V LED DRIVER Programmable 30W 0-10V Dimming

1-100% Output Range 15V to 55V Current 0.35A to 1.25A Max 30W

Class 2 Small Case Size with Side leads

347V Electronic **Programmable (NFC)** LED Driver 0-10V Dimming **1-100%**. Output Range of 15V to 55V for Single circuit 30W maximum.

Technical Specification:

Class 2 UL, CUL Recognized, ROHS Compliant
 EMI FCC Parts 18, Subparts C, Class A
 Rating: TL IP 64 Damp, Dry
 Output Open/Short Protection
 Min. Starting Temp: 0° C
 Max. Case Temp: 90° C
 Typical Efficiency 85%

Input Voltage range: $\pm 10\%$
 Output Load range $\pm 5\%$
 Input Frequency: 50/60HZ
 THD: $< 20\%$
 Power Factor Min: 0.90
 Remote Wiring Distance Full Load: 18AWG -18 ft

Case Size: Series C1U



Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

2/1/17

| INPUT VOLTAGE | INPUT CURRENT | INPUT WATTS | OUTPUT POWER WATTS MAX | OUTPUT VOLTAGE | OUTPUT CURRENT AMPS | MODEL |
|---------------|---------------|-------------|------------------------|----------------|---------------------|----------------|
| 347 | 0.1A | 37 | 30 | 15 - 55 | 0.35 - 1.25 | PC1250C30WS-D1 |

LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Product will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer

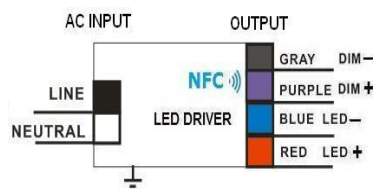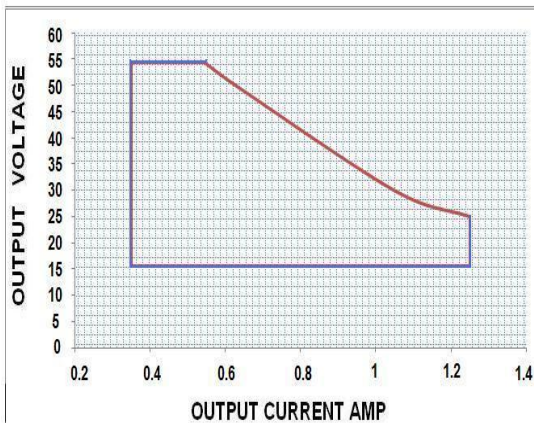


Place the Programmable wand above the NFC Mark on the LED Driver to start programming

0-10V Dimmer

Compatibility Chart

| LEVITON | LUTRON |
|-----------|---------|
| DS710-10Z | NFTV |
| | DVTV-WH |

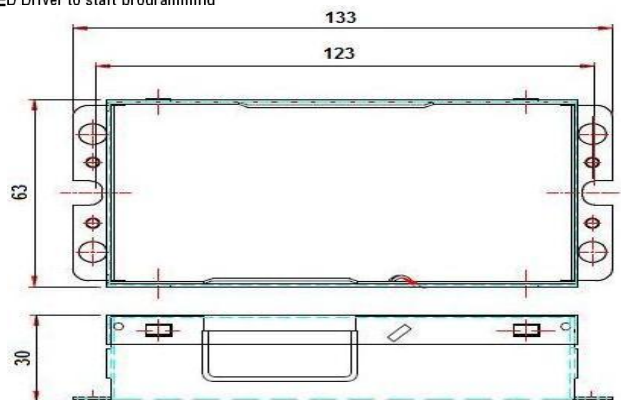

Series C1U L W H ML
 Case Size: 133mm 63mm 30mm 123mm
 5.23inch 2.48inch 1.18inch 4.84inch

WARNING: Always Disconnect Power Before Handling.
Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.