

347V LED DRIVER Programmable 60W 0-10V Dimming

1-100% Output Range 27V to 55V Current 0.7A to 1.4A Max 60W

Class 2 Slim Case Size with Leads

347V Electronic **Programmable (NFC)** LED Driver 0-10V Dimming **1-100%**. Output Range of 27V to 55V for Single circuit 60W maximum.

Technical Specification:

Class 2 UL, CUL Recognized, ROHS Compliant
 EMI FCC Parts 18, Subparts C, Class A
 Rating: **TL** IP 64 Damp
 Output Open/Short Protection
 Min. Starting Temp: 0° C
 Max. Case Temp: 90° C
 Typical Efficiency 90%

Input Voltage range: $\pm 10\%$
 Output Load range: $\pm 5\%$
 Input Frequency: 50/60HZ
 THD: < 20%
 Power Factor Min: 0.90
 Remote Wiring Distance Full Load: 18AWG -18 ft

Case Size: Series MUL

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

INPUT VOLTAGE	INPUT CURRENT	INPUT WATTS	OUTPUT POWER WATTS MAX	OUTPUT VOLTAGE	OUTPUT CURRENT AMPS	MODEL
347	0.2	69	60	27 - 55	0.7 - 1.4	PC1400C60WRSD1

LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Product will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer

Lead Length

Colour	inch	cm
Black	5.9	15
White	5.9	15
Blue	5.9	15
Red	5.9	15
Gray	5.9	15
Purple	5.9	15

0-10V Dimmer

Compatibility Chart


LEVITON	LUTRON
DS710-10Z	NFTV
	DVTV-WH



Place the Programmable wand above the NFC Mark on the LED Driver to start programming

Series MUL	L	W	H	ML
Case Size:	241mm	43mm	29mm	226mm
	9.5inch	1.7inch	1.14inch	8.9inch

WARNING: Always Disconnect Power Before Handling. Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.

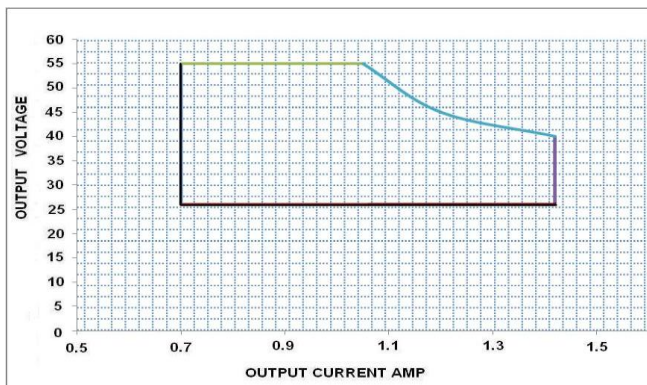

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7
 TEL: 604-904-9533 FAX: 604-904-9634
 EMAIL: sagelighting@shaw.ca www.sagelighting.com

Sage Lighting Ltd.