

LED DRIVER Programmable 30W 0-10V Dimming

1-100% Output Range 15V to 55V Current 0.35A to 1.25A Max 30W

Class 2 Low Profile Slim Case Size with Side Leads

Universal Voltage 120-277V Electronic **Programmable (NFC)** LED Driver 0-10V Dimming **1-100%**. Output Range of 15V to 55V for Single circuit 30W maximum.

Technical Specification:

Class 2 UL, CUL Recognized, ROHS Compliant
EMI FCC Parts 18, Subparts C, Class A
Rating: TL IP 30 Damp, Dry
Output Open/Short Protection
Min. Starting Temp: 0° C
Max. Case Temp: 90° C
Typical Efficiency 85%

Input Voltage range: $\pm 10\%$
Output Load range $\pm 5\%$
Input Frequency: 50/60HZ
THD: < 20%
Power Factor Min: 0.90
Remote Wiring Distance Full Load: 18AWG -18 ft

Case Size: Series E3L

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

INPUT VOLTAGE	INPUT CURRENT	INPUT WATTS	OUTPUT POWER WATTS MAX	OUTPUT VOLTAGE	OUTPUT CURRENT AMPS	MODEL
120-277	0.3 - 0.13A	37	30	15 - 55V	0.35 - 1.25	PU1250C30WSD1-E3L

LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Product will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer




Lead Length

Colour	inch	cm
Black	5.9	15
White	5.9	15
Blue	5.9	15
Red	5.9	15
Gray	5.9	15
Purple	5.9	15

0-10V Dimmer

Compatibility Chart

LEVITON	LUTRON
DS710-10Z	NFTV
	DVTV-WH

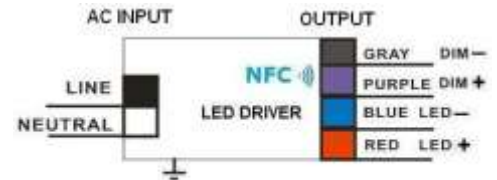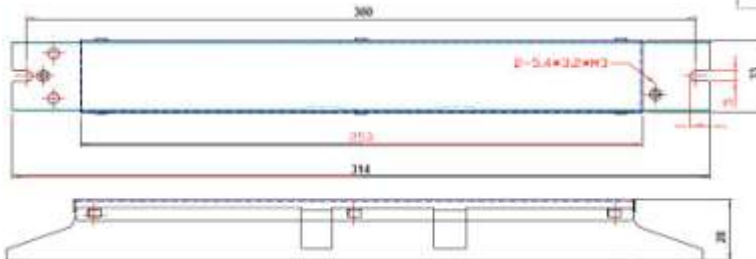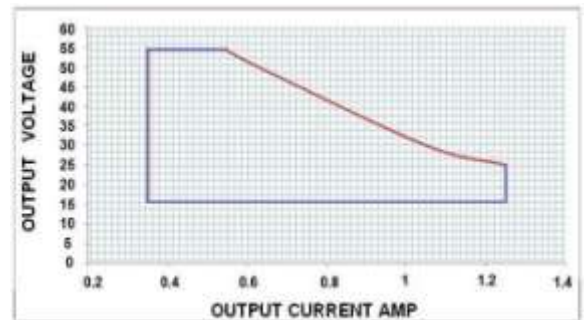

Place the Programmable wand above the NFC Mark on the LED Driver to start programming

WARNING: Always Disconnect Power Before Handling.
Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.

Case Size: L W H ML
Series E3L 325 mm 34mm 29mm 317mm
12.8inch 1.34inch 1.14inch 12.48inch