

120V-347V LED DRIVER 40W 0-10V Dimming

Output Range 28V to 36V Constant Current 1100mA Max 40W

Multi Voltage 120-347V Electronic Constant Current LED Driver 0-10V Dimming. Output Range of 28V to 36V for Single Output circuit 40W maximum.

Technical Specification:

UL, CUL Certified, ROHS Compliant
 EMI FCC Parts 18, Subparts C, Class A
 Rating: IP 65 Damp, Dry
 Output Open/Short Protection
 Min. Starting Temp: - 40° C
 Max. Case Temp: 90° C
 Typical Efficiency: 89%



Input Voltage range: $\pm 10\%$
 Output Load range $\pm 5\%$
 Input Frequency: 50/60HZ
 THD: < 20%
 Power Factor Min: 0.90
 Remote Wiring Distance Full Load: 18AWG -18 ft

Case Size: Series MUL

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

INPUT VOLTAGE	INPUT CURRENT	INPUT WATTS	OUTPUT POWER WATTS MAX	OUTPUT VOLTAGE	OUTPUT CURRENT AMPS	MODEL
120	0.38A	46	40	28 to 36V	1.1A	NM1100C40WRSD
347	0.14A					

LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Product will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer


Lead Length

Colour	inch	cm
Black	5.9	15
White	5.9	15
Blue	5.9	15
Red	5.9	15
Gray	5.9	15
Purple	5.9	15

0-10V Dimmer


Compatibility Chart

LEVITON	LUTRON
DS710-10Z	NFTV
	DVTV-WH

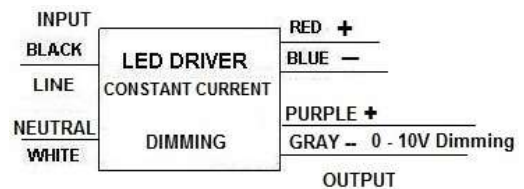

Series MUL	L	W	H	ML
Case Size:	241mm	43mm	29mm	226mm
	9.5inch	1.7inch	1.14inch	8.9inch

WARNING: Always Disconnect Power Before Handling.
Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.

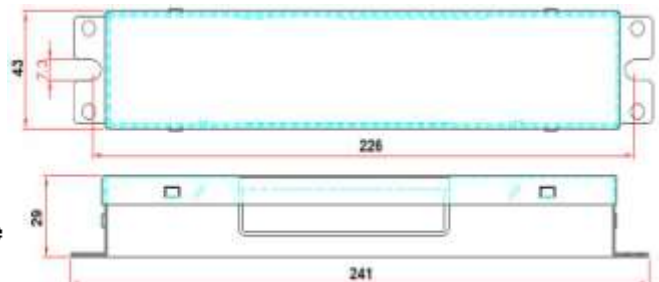

120V-347V LED DRIVER 40W 0-10V Dimming

Output Range 28V to 36V Constant Current 1100mA Max 40W
NM1100C40WRSD Series MUL

Input Specifications

Parameter	Min.	Typ.	Max.	Notes
Input Voltage	108V	120/277V	381V	
Input Current	-	-	0.38A RMS	@120Vac input with full load
Input Frequency	47Hz	60Hz	63Hz	
Leakage Current	-	-	0.7mA	@120Vac input
Turn On Time	-	-	1.0s	@120Vac input at full load
Hold Up Time	-	-	0.1s	@Nominal input and full load
Efficiency	85%	87%	89%	@120Vac input at full load
Standby Power	-	-	3W	
Current Total Harmonic	-	-	20%	

Output Specifications

Parameter	Min.	Typ.	Max.	Notes
Output Voltage	28V	-	36V	
Output Current	-	1100mA	-	
No-Load Output Voltage	36V	46V	56V	
Rated Current	1050mA	1100mA	1155mA	
Rated Power	-	40W	-	
Line Regulation	-	-	±5%	
Output Current Ripple	-	±10%	-	

General Specifications

Parameter	Min.	Typ.	Max.	Notes
MTBF	-	100,000 Hours	-	@25°C ambient temperature
Lifespan Time	75,000 Hours	-	-	In the range of specification required by normal use of the power supply at ambient temperature 55°C
Cold Start	-	-	1.0s	@-40°C

120V-347V LED DRIVER 40W 0-10V Dimming

Output Range 28V to 36V Constant Current 1100mA Max 40W
 NM1100C40WRSD Series MUL

Environmental Specifications

Parameter	Min.	Typ.	Max.	Notes
Operation Temperature	-40°C	-	50°C	
Storage Temperature	-40°C	-	80°C	
Humidity	10%	-	90%	

High Temperature Durability

Power storage environment at 80°C 24hours, will not damage the electrical, mechanical properties and also not cause other adverse reactions.

Switch ON/OFF Test

Power at ambient temperature 25°C 1s/on, 1s/off, last up to 10,000 cycles, will not damage the electrical ,mechanical properties and also not cause other adverse reactions.

Safety and EMC Compliance

Safety Standards	Withstand Voltage	Isolation Resistance	EMC Standards	
			EMI	EMS
UL 8750 UL1310 Class 2 Class P	I/P-O/P: 2.0K Vac I/P-FG: 2.0K Vac O/P-FG: 0.5K Vac	I/P-O/P: I/P-FG: O/P-FG: 100Mohm/500VDC	FCC Part 15 class A UL8750 CSA C22.2 No. 250.13-14	FCC Part 15 class A UL 8750

120V-347V LED DRIVER 40W 0-10V Dimming

Output Range 28V to 36V Constant Current 1100mA Max 40W
 NM1100C40WRSD Series MUL

