

# LED DRIVER 60W 0-10V Dimming

Output Range 26V to 43V Constant Current 1400mA Max **60W**

**Class 2** with Input leads and Output terminal blocks for Panel Lights

Universal Voltage 120-277V Electronic Constant Current LED Driver 0-10V Dimming. Output Range of 26V to 43V for Single circuit 60W maximum.

## Technical Specification:

Class 2 UL, CUL Certified, ROHS Compliant  
 EMI FCC Parts 18, Subparts C, Class A  
 Rating: IP 30 Damp, Dry  
 Output Open/Short Protection  
 Min. Starting Temp: - 40° C  
 Max. Case Temp: 90° C  
 Typical Efficiency: 88%



Input Voltage range:  $\pm 10\%$   
 Output Load range  $\pm 5\%$   
 Input Frequency: 50/60HZ  
 THD: < 20%  
 Power Factor Min: 0.90  
 Remote Mounting Distance: 18AWG -18 ft

**Case Size: Series CM**

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

INPUT VOLTAGE	INPUT CURRENT	INPUT WATTS	OUTPUT POWER WATTS MAX	OUTPUT VOLTAGE	OUTPUT CURRENT AMPS	MODEL
120	0.61A	68	60	26 - 43	1.4A	NU1400C60WSD-CM
277	0.26A					

### LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Product will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer


### Lead Length

Colour	inch	cm
Black	2	5.1
White	2	5.1
Green	2	5.1


### 0-10V Dimmer

#### Compatibility Chart

LEVITON	LUTRON
DS710-10Z	NFTV
	DVTV-WH



Case Size:	L	W	H	ML
Sereis CM	206mm	87mm	34.5mm	45mm
	8.11inch	3.43inch	1.36inch	1.77inch

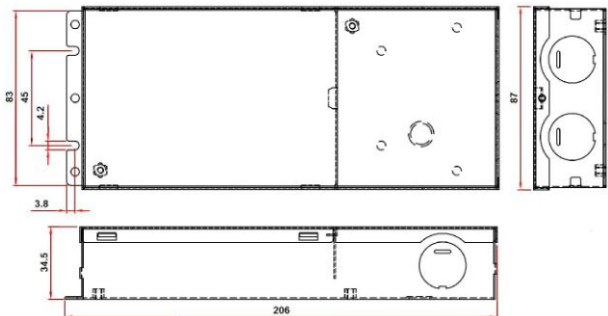

**WARNING: Always Disconnect Power Before Handling.**  
**Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.**