

120V-347V LED DRIVER 80W 0-10V Dimming

Output Range 28V to 36V Constant Current 2100mA **Max 80W**

Slim low profile case with terminal blocks

Multi Voltage 120-347V Electronic Constant Current LED Driver 0-10V Dimming. Output Range of 28V to 36V for Single circuit 80W maximum.

Technical Specification:

UL, CUL Certified, ROHS Compliant
 EMI FCC Parts 18, Subparts C, Class A
 Rating: IP 30 Damp, Dry
 Output Open/Short Protection
 Min. Starting Temp: - 40° C
 Max. Case Temp: 90° C
 Typical Efficiency: 88%



Input Voltage range: **+ 10%**
 Output Load range **+ 5%**
 Input Frequency: **50/60HZ**
 THD: **< 20%**
 Power Factor Min: **0.90**
 Remote Wiring Distance Full Load: **18AWG -18 ft**
 Terminal Blocks

Case Size: Series E13

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

INPUT VOLTAGE	INPUT CURRENT	INPUT WATTS	OUTPUT POWER WATTS MAX	OUTPUT VOLTAGE	OUTPUT CURRENT AMPS	MODEL
120	0.83A	91	80	28 to 36V	1.5 to 2.2A	NM2200C80WSD
347	0.27A					


LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Product will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer

0-10V Dimmer Compatibility Chart

LEVITON	LUTRON
DS710-10Z	NFTV
	DVTV-WH

VR: Control Output 1.5 to 2.2A

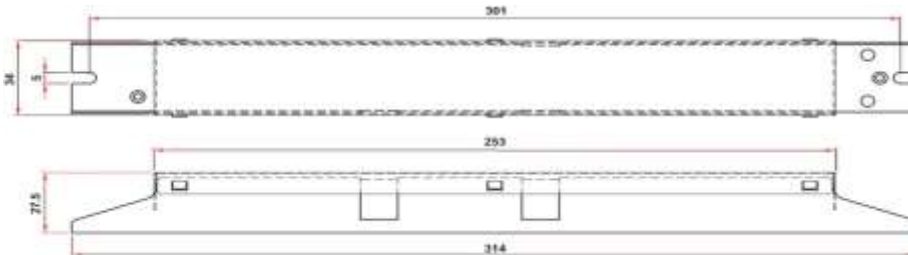

WARNING: Always Disconnect Power Before Handling.
 Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.

	L	W	H	ML
Series E13	314 mm	34mm	27.5mm	301mm
Case Size:	12.36inch	1.34inch	1.08inch	11.85inch

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7
 TEL: 604-904-9533 FAX: 604-904-9634
 EMAIL: sagelighting@shaw.ca www.sagelighting.com

