

LED DRIVER 42W 0-10V Dimming

Output Range 24V to 40V Selectable Multi Current 1.0 to 1.05A **Max 42W**
Class 2 with Input leads and Output terminal blocks for Panel Lights

Universal Voltage 120-277V Selectable Multi Current 1000mA to 1050mA Electronic LED Driver 0-10V Dimming. Output Range of 24V to 40V for Single circuit 42W maximum.

Technical Specification:

Class 2 UL, CUL Certified, ROHS Compliant
 EMI FCC Parts 18, Subparts C, Class A
 Rating: IP 30 Damp, Dry Class 2
 Output Open/Short Protection
 Min. Starting Temp: - 40° C
 Max. Case Temp: 90° C
 Typical Efficiency: 88%



Input Voltage range: $\pm 10\%$
 Output Load range $\pm 5\%$
 Input Frequency: 50/60HZ
 THD: < 20%
 Power Factor Min: 0.90
 Remote Mounting Distance: 18AWG -18 ft

Case Size: Series CM

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

INPUT VOLTAGE	INPUT CURRENT	INPUT WATTS	OUTPUT POWER WATTS MAX	OUTPUT VOLTAGE	OUTPUT CURRENT AMPS	MODEL
120	0.41A	47- 49	40 to 42	24 to 40V	1A / 1.05A	NU1050D2C42WSD
277	0.18A					

LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Product will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer


Lead Length

Colour	inch	cm
Black	2	5.1
White	2	5.1
Green	2	5.1


0-10V Dimmer

Compatibility Chart

LEVITON	LUTRON
DS710-10Z	NFTV
	DVTV-WH

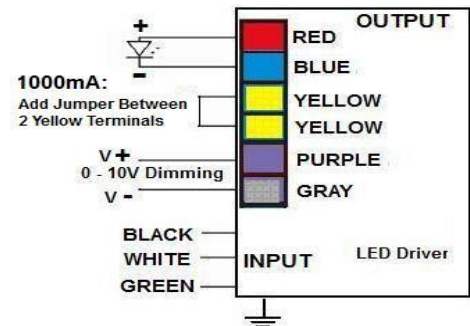

Case Size:	L	W	H	ML
Sereis CM	206mm	87mm	34.5mm	45mm
	8.11inch	3.43inch	1.36inch	1.77inch

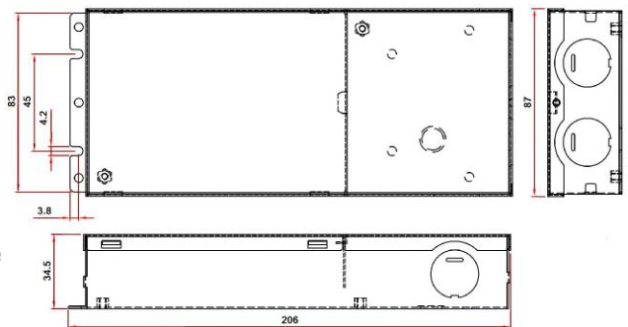

WARNING: Always Disconnect Power Before Handling.
Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7
 TEL: 604-904-9533 FAX: 604-904-9634
 EMAIL: sagelighting@shaw.ca www.sagelighting.com

Sage Lighting Ltd.