

LED DRIVER Programmable 60W 0-10V Dimming

Output Range 27V to 55V Constant Current 0.7A to 1.4A Max **60W**
Class 2 Low Profile Slim Case Size with Terminal Blocks

Universal Voltage 120-277V Electronic **Programmable (NFC)** LED Driver 0-10V Dimming. Output Range of 27V to 55V for Single circuit 60W maximum.

Technical Specification:

Class 2 UL, CUL Recognized, ROHS Compliant
 EMI FCC Parts 18, Subparts C, Class A
 Rating: TL IP 30 Damp
 Output Open/Short Protection
 Min. Starting Temp: - 40° C
 Max. Case Temp: 90° C
 Typical Efficiency 86%

Input Voltage range: $\pm 10\%$
 Output Load range $\pm 5\%$
 Input Frequency: 50/60HZ
 THD: < 20%
 Power Factor Min: 0.90
 Remote Wiring Distance Full Load: 18AWG -18 ft
 Terminal Blocks

Case Size: Series E13


Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

3/3/18

INPUT VOLTAGE	INPUT CURRENT	INPUT WATTS	OUTPUT POWER WATTS MAX	OUTPUT VOLTAGE	OUTPUT CURRENT AMPS	MODEL
120	0.6A	70	60	27 to 55V	0.7 - 1.4	PU1400C60WSDIM
277	0.26A					

LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Product will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer

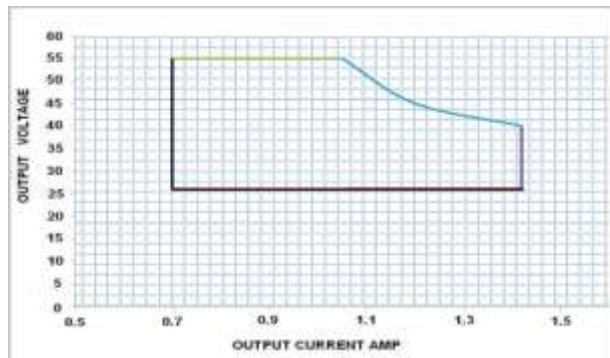


0-10V Dimmer Compatibility Chart

LEVITON	LUTRON
DS710-10Z	NFTV
	DVTV-WH

L W H ML
 Series E13 314mm 34mm 27.5mm 301mm
 Case Size: 12.36inch 1.34inch 1.08inch 11.85inch

WARNING: Always Disconnect Power Before Handling.
Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.

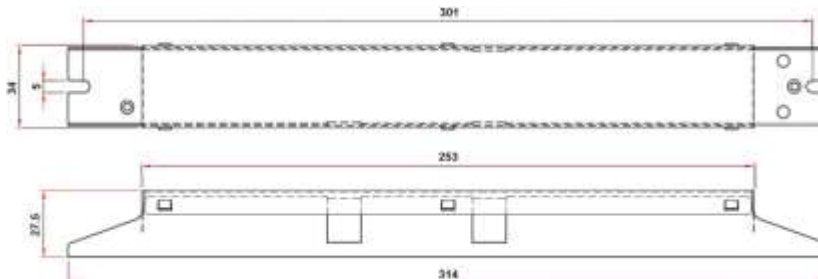

Both Positive & Negative Output Connectors are equal - similar electrical position. Place the Programmable wand above the NFC Mark on the LED Driver to start programming